
The Right String

Lols and Learnings while pairing with CoPilot



Optimism

ne Right String

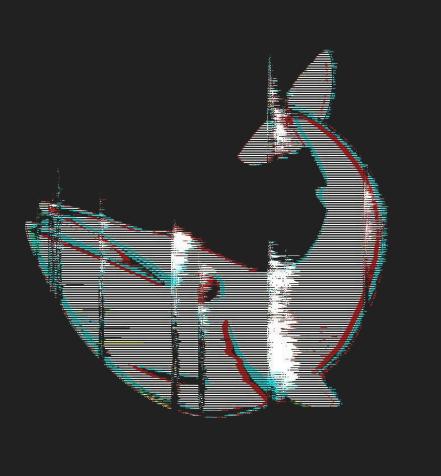









ANYWAY

body: `{"user_id": "12345678901234567890123456789012345678901234567890123456789012345678901234567890"}`

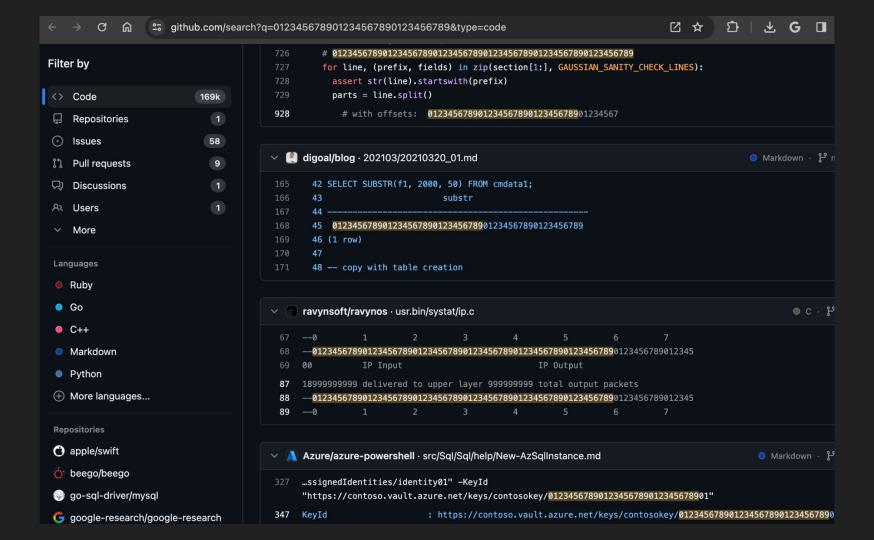

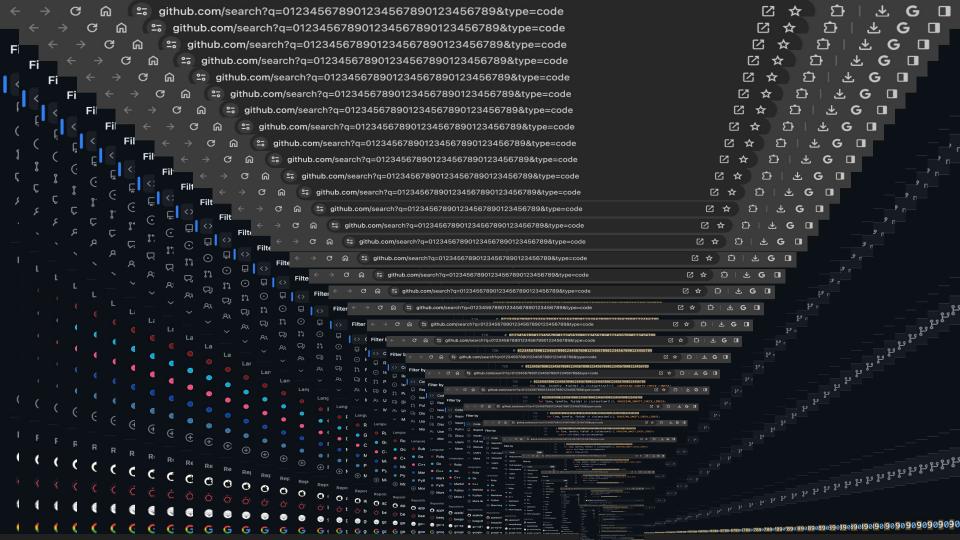

body: `{"user_id": "12345678901234567890123456789012345678901234567890123456789012345678901234567890"}`

```
// read all r.Body into a byte array
body, err := ioutil.ReadAll(r.Body)
if err != nil {
    http.Error(w, "failed to read request body", http.StatusInternalServerError)
    return
```

```
ioutil.ReadAll is deprecated: As of Go 1.16, this function simply calls
[io.ReadAll]. deprecated(default)
```

func ioutil.ReadAll(r io.Reader) ([]byte, error)


ReadAll reads from r until an error or EOF and returns the data it read. A successful call returns err == nil, not err == EOF. Because ReadAll is defined to read from src until EOF, it does not treat an EOF from Read as an error to be reported.

Deprecated: As of Go 1.16, this function simply calls io.ReadAll.

ioutil.ReadAll on pkg.go.dev

No quick fixes available

```
body, err := io.ReadAll(r.Body)
if err != nil {
   http.Error(w, "failed to read request body", http.StatusInternalServerError)
   return
}
```

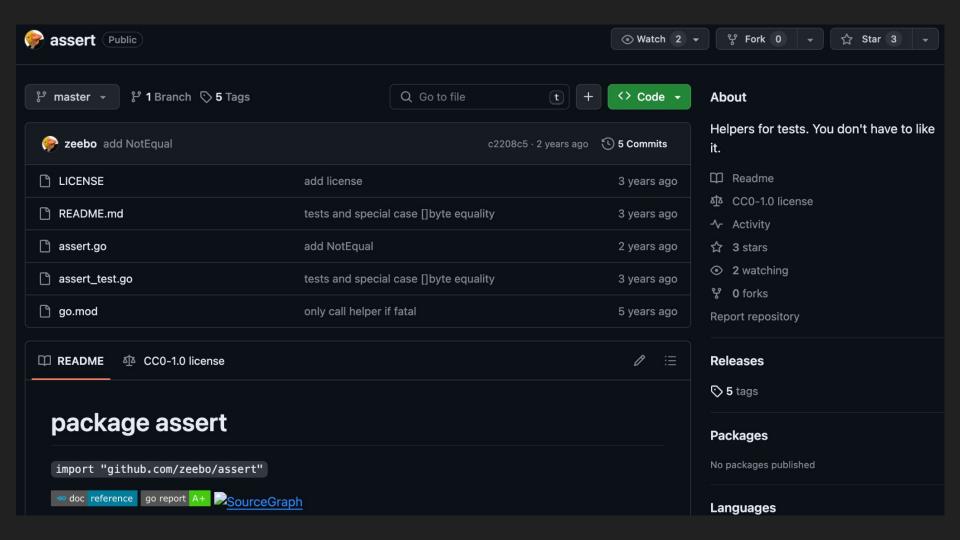

Dependency graph

Dependencies

Dependents


Repositories that depend on github.com/zeebo/assert




1,050 Repositories 😭 116 Packages 🛈





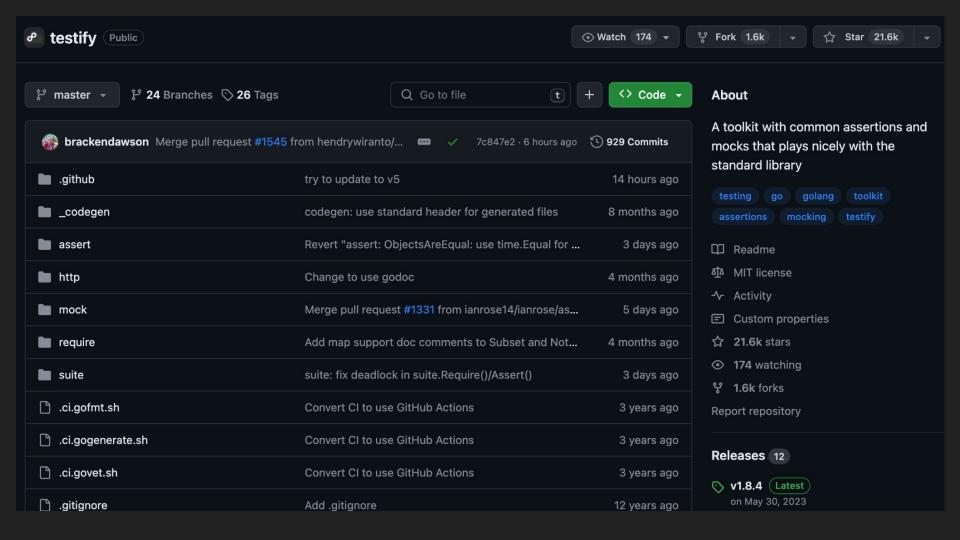

Name: bigquery.NullString{Valid: name != nil, StringVal: *name},
Date: bigquery.NullDateTime{Valid: parseDateErr != nil, DateTime: date},

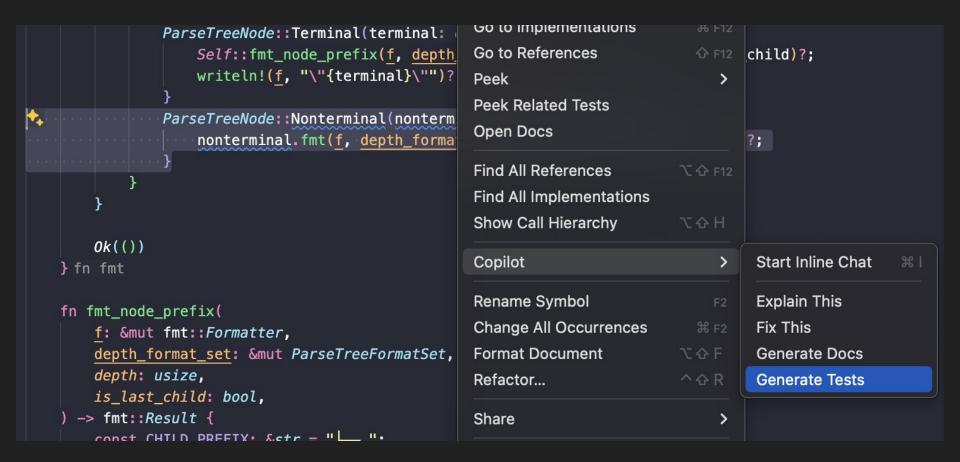

```
func HtmlToPdf(ctx context.Context, bkt *storage.BucketHandle, objName, html string) error {
       pdf := rod.New().MustConnect().MustPage().MustSetDocumentContent(html).MustPDF()
       obj := bkt.Object(objName + ".pdf")
       bw := obj.NewWriter(ctx)
       _, err := bw.Write(pdf)
       defer bw.Close()
        return err
```

```
<!-- a basic hello world index.html with a favicon, using bulma css, and htmx. -->
<!DOCTYPE html>
<!-- a basic hello world index.html with a favicon, using bulma css, and htmx. -->
<!DOCTYPE html>
<html lang="en"></html>
<head>
   <meta charset="UTF-8">
   <meta name="viewport" content="width=device-width, initial-scale=1.0">
   <link rel="icon" href="favicon.ico" type="image/x-icon">
   <link rel="stylesheet" href="https://cdn.jsdelivr.net/npm/bulma@0.9.2/css/bulma.min.css">
   <title>htmx hello world</title>
```


```
<!-- a basic hello world index.html with a favicon, using bulma css, and htmx. -->
<!DOCTYPE html>
<html lang="en"></html>
<head>
    <meta charset="UTF-8">
    <meta name="viewport" content="width=device-width, initial-scale=1.0">
    <link rel="icon" href="favicon.ico" type="image/x-icon">
    <link rel="stylesheet" href="https://cdn.jsdelivr.net/npm/bulma@0.9.2/css/bulma.min.css">
    <title>htmx hello world</title>
</head>
<body>
    <section class="section">
        <div class="container">
           <h1 class="title">
               htmx hello world
           </h1>
           This is a simple hello world example using htmx.
           <div hx-target="#hello"></div>
       </div>
    </section>
    <script src="https://cdn.isdelivr.net/npm/htmx.org@1.7.0"></script>
```

htmx hello world


This is a simple hello world example using htmx.

Click me



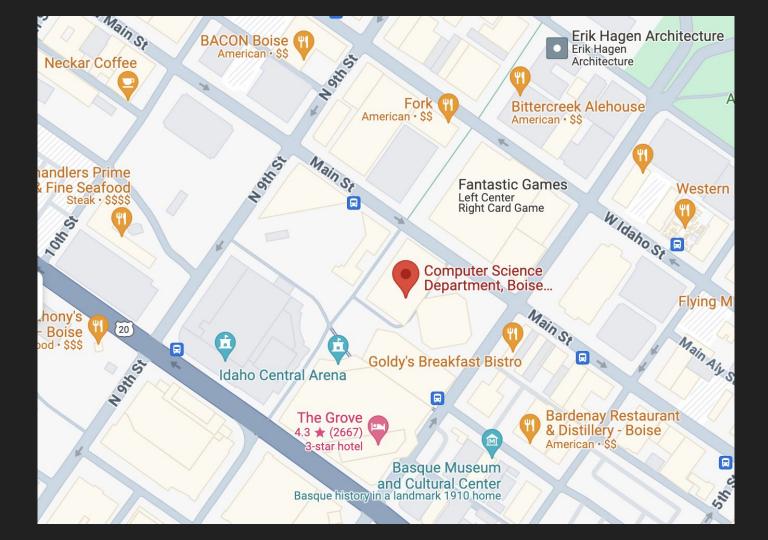



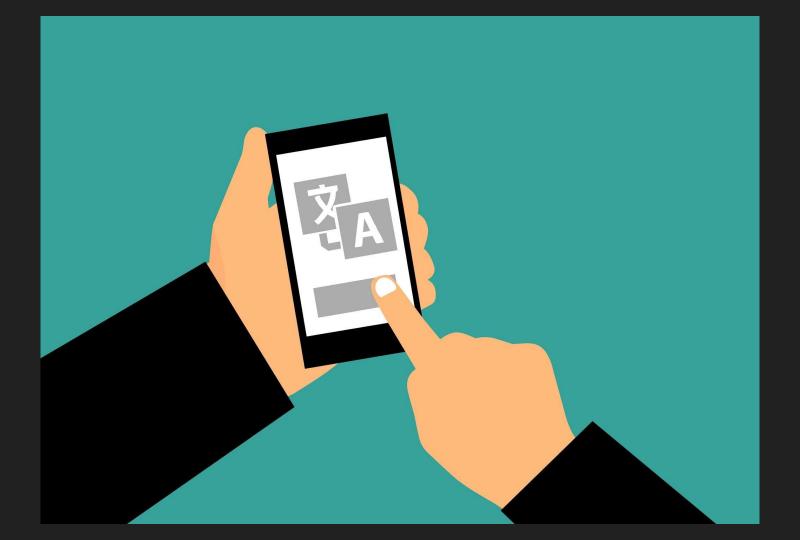



BLAME GAME –

Air Canada must honor refund policy invented by airline's chatbot


Air Canada appears to have quietly killed its costly chatbot support.

ASHLEY BELANGER - 2/16/2024, 10:12 AM





jk I'm sure

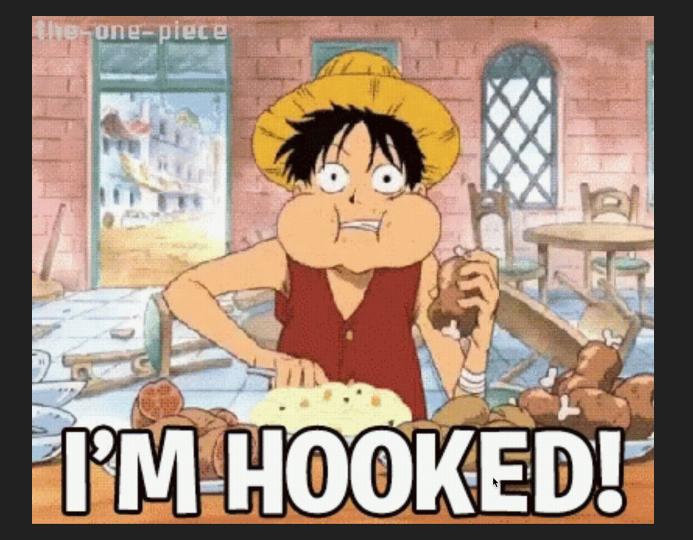

Thank you!

https://sheas.blog/talks.html [slides]
https://github.com/shnewto
https://mastodon.social/@shnewto
https://www.linkedin.com/in/sheanewton

Questions?